

## FLG72GC

### GAS FRY TOP WITH OPEN UNIT, COMPOUND SMOOTH PLATE



- Steel unit
- 1.2mm thick pressed top lowered by 3cm compared to the work surface
- Height-adjustable cooktop (850-900 mm)
- Built-in plate for even cooking and ease of cleaning.
- Smooth compound plate (FE430 and AISI316).
- Top with drain hole and pressed fat collector GN1/3
- Shaped instrument panel with controls tilted toward the operator
- Heated by a two-branch steel burner with stabilised flame and 4 flame lines for each area
- Gas controlled by a safety thermostatic valve with cut-out
- Manually controlled temperature
- Automatic piezoelectric ignition
- Cooking surface 330x470mm
- Open steel base
- Stainless steel height-adjustable feet

#### General technical data

Dimensions: (mm) **400x700x900**



Volume: (m<sup>3</sup>) **0,5**

Weight:: (Kg) **75**

#### Gas connection

kW **7**

UNI ISO 7\1 R 1/2"

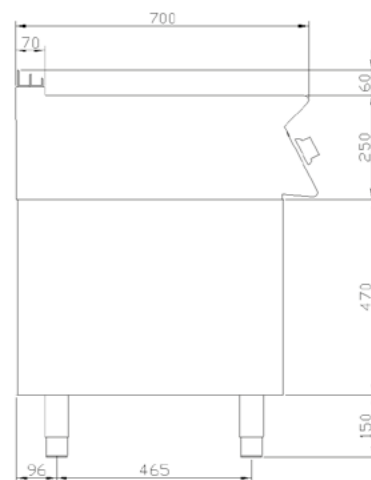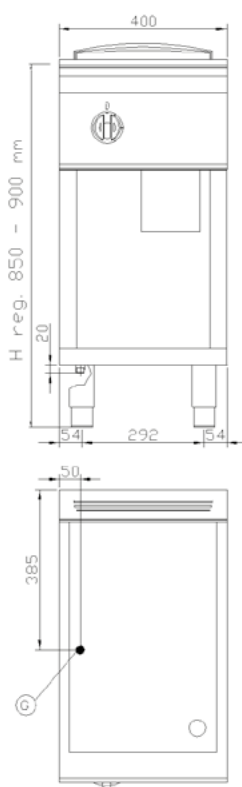

- (G) GAS INLET  
 (E) ELECTRICAL PLUG  
 (A) WATER INLET  
 (C) HOT WATER INLET  
 (F) COLD WATER INLET  
 (S) WATER DRAIN